


PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6 : B01J 3/06 // A23L 3/015, B22F 3/15	A1	(11) International Publication Number: WO 99/64144 (43) International Publication Date: 16 December 1999 (16.12.99)
(21) International Application Number: PCT/SE99/00963 (22) International Filing Date: 4 June 1999 (04.06.99) (30) Priority Data: 9802069-6 9 June 1998 (09.06.98) SE (71) Applicant (for all designated States except US): ABB AB [SE/SE]; S-721 83 Västerås (SE). (72) Inventor; and (75) Inventor/Applicant (for US only): LÖNNEBORG, Nils-Gunnar [SE/SE]; Barometergatan 15, S-723 50 Västerås (SE). (74) Agent: ABB AB; Patent, S-721 78 Västerås (SE).		(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>

(54) Title: DEVICE AND METHOD FOR A HIGH PRESSURE PRESS

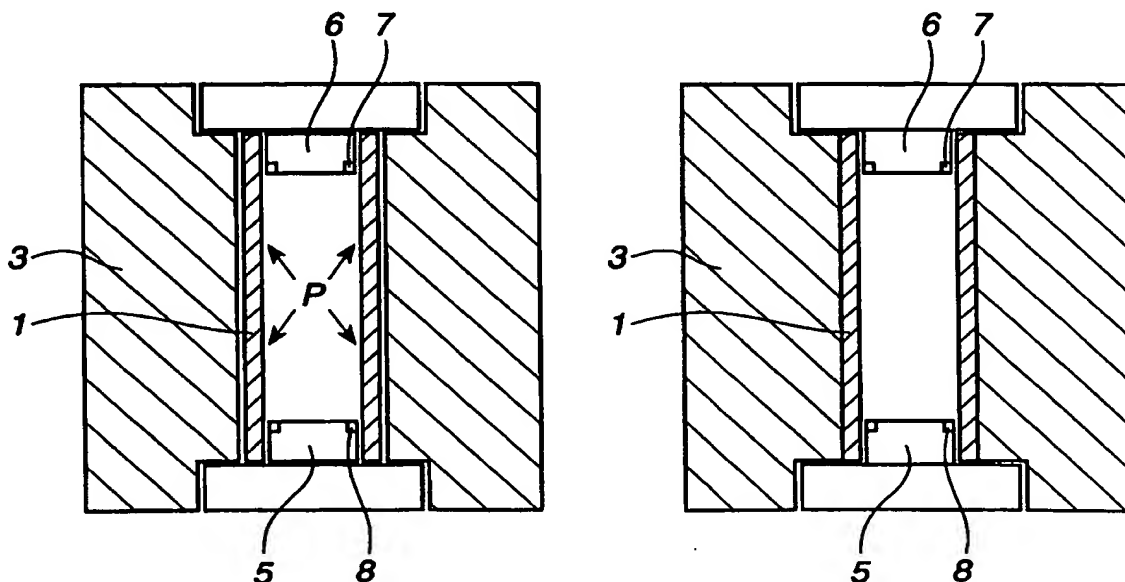

(57) Abstract

6413
A method to provide a high pressure press with a replaceable wear liner (1). The wear liner (1) is first inserted into the cylindrical pressure chamber (2) of the press and the pre-stressed by the application of an excess pressure above the yield point. The excess pressure is sufficient to increase the diameter of the wear liner and produce a residual radial compressive stress that holds the wear liner in place. When the wear liner is removed from the press it is dismantled. The advantage of the invention is that the replaceable wear liner, and a high pressure press comprising it, may be relatively inexpensive to produce and the replaceable wear liner may be quickly and simply replaced.